
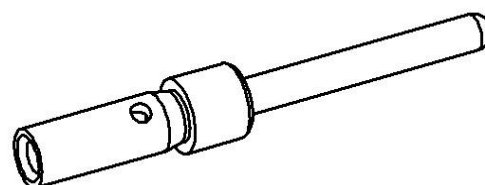


## 5A Male Contact, Gold Plated, 0.33mm<sup>2</sup>

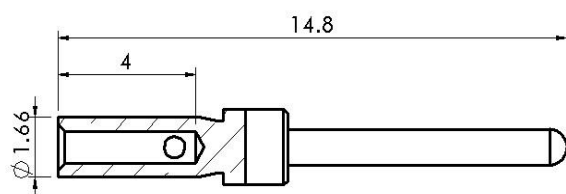

Typecode SGM-0.33  
ID 1007060000006

### Technical Data

#### Product Properties

Series	5A
Mating with	5 A inserts
Gender	Male
Core cross-section	0.25~0.33mm <sup>2</sup> /28 AWG~22 AWG
Working current	≤5 A
Contact resistance	≤3 mΩ
Stripping length	5mm
Mechanical lifespan	≥500 Mating cycles
Standard	EN 60664-1 IEC 61984

#### Material

Material	Copper alloy
Surface treatment	Gold plated

#### Commercial data

Weight	0.0002 kg
Packaging unit	100 pc
Country of origin	CN

### Features

- Resistant to salt spray
- RoHS-compliant

\*这里所列的是设计数据, 有关产品的变更不在此做说明, 未尽事宜请联系客服。用户有责任验证功能、符合适用的法律和指令以及在特定应用中的电气安全。