
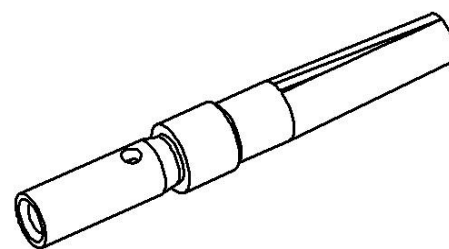


5A Female Contact, Gold Plated, 0.33mm²

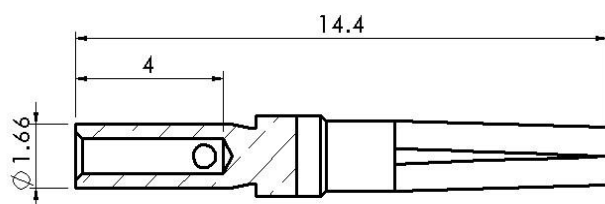

Typecode SGF-0.33
ID 1007070000006

Technical Data

Product Properties

| | |
|---------------------|---|
| Series | 5A |
| Mating with | 5 A inserts |
| Gender | Female |
| Core cross-section | 0.09~0.25mm ² /28 AWG~24 AWG |
| Working current | ≤5 A |
| Contact resistance | ≤3 mΩ |
| Stripping length | 5mm |
| Mechanical lifespan | ≥500 Mating cycles |
| Standard | EN 60664-1 IEC 61984 |

Material

| | |
|-------------------|--------------|
| Material | Copper alloy |
| Surface treatment | Gold plated |

Commercial data

| | |
|-------------------|-----------|
| Weight | 0.0002 kg |
| Packaging unit | 100 pc |
| Country of origin | CN |

Features

- Resistant to salt spray
- RoHS-compliant
- Copper content ≥ 90%

*这里所列的是设计数据, 有关产品的变更不在此做说明, 未尽事宜请联系客服。用户有责任验证功能、符合适用的法律和指令以及在特定应用中的电气安全。