
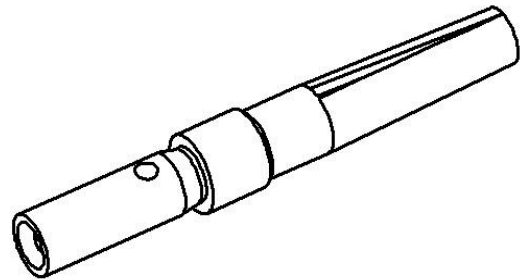


5A Female Contact, Silver Plated, 0.25mm²

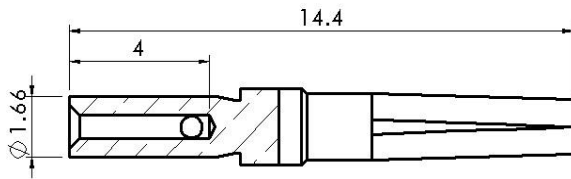

Typecode SSF-0.25
ID 1007070000001

Technical Data

Product Properties	
Series	5A
Mating with	5 A inserts
Gender	Female
Core cross-section	0.09~0.25mm ² /28 AWG~24 AWG
Working current	≤5 A
Contact resistance	≤3 mΩ
Stripping length	5mm
Mechanical lifespan	≥500 Mating cycles
Standard	EN 60664-1 IEC 61984

Material	
Material	Copper alloy
Surface treatment	Silver plated

Commercial data	
Weight	0.0002 kg
Packaging unit	100 pc
Country of origin	CN

Features

- Resistant to salt spray
- Resistance to sulfur gases
- RoHS-compliant
- Copper content ≥ 90%

*这里所列的是设计数据, 有关产品的变更不在此做说明, 未尽事宜请联系客服。用户有责任验证功能、符合适用的法律和指令以及在特定应用中的电气安全。