
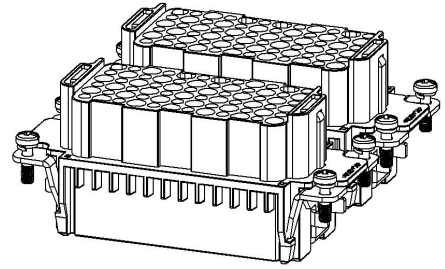



## HDD Series, Crimp Connection, 144 pin, Femle insert

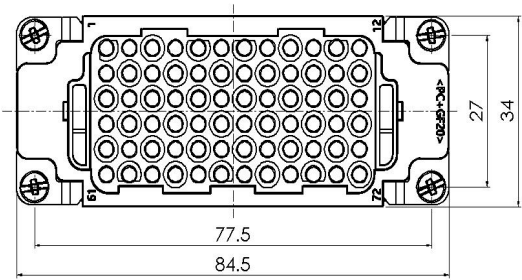

Typecode HDD-144-FC(73-144)

ID 1 007 03 000092

### Technical Data

#### Product Properties

Series	HDD
Mating with	H32B
Connection mode	Crimp termination
Gender	Femle
Rated voltage	250 V
Rated current	10 A
Rated impulse voltage	4 kV
Mating contact	10A (DSF/DGF)
Number of pins	144
Core cross-section/Clamping ability	0.14~ 2.5 mm <sup>2</sup> /AWG26 ~ AWG14
Grounding conductor	Yes
Pollution degree	3
Insulation resistance	≥ 10 <sup>10</sup> Ω
Limiting temperature	-40 °C ~ +125 °C
Standard	EN 60664-1, IEC 61984

#### Insert

Material	PC
Colour	RAL 7032

#### Commercial data

Weight	0.11 kg
Packaging unit	1 pc
Country of origin	CN

### Features

- High quality engineering plastics
- Crimp termination
- ≥ 500 Mating cycles
- Approval: CE
- RoHS-compliant

\*这里所列的是设计数据，有关产品的变更不在此做说明，未尽事宜请联系客服。用户有责任验证功能、符合适用的法律和指令以及在特定应用中的电气安全。